

ChemLINE[®] 784/32

A coating with superior chemical resistance and high temperature resistance.



Description

ChemLine[®] 784/32 is a high functionality, two component thermoset polymer coating. When cured, the ChemLine[®] 784/32 high cross-link density is unlike other coatings. ChemLine[®] 784/32 delivers significantly improved product performance and anti-corrosion resistance. ChemLine[®] 784/32 coating is formulated with a unique polymer designed and engineered with 28 functional groups per molecule. This bridged aromatic backbone structure, when polymerized, translates into 784 crosslinks. ChemLine[®] 784/32 cross-links predominately through an ether (carbon-oxygen-carbon) linkage. This eliminates high concentrations of hydroxyl groups (found in epoxies) and precludes formation of ester groups (found in vinylesters) which are subject to hydrolysis and acid attack. ChemLine[®] 784/32 can be ambient cured over time or low temperature forced air cured for immediate service.

ChemLine[®] 784/32's Higher Cross-Link Density Means:

- ▶ Higher chemical resistance
- ▶ Higher toughness
- ▶ Higher heat resistance
- ▶ Higher resistance to abrasion

Provides Superior Chemical Resistance to:

- ▶ 98% Sulfuric Acid
- ▶ Methanol
- ▶ 37% Hydrochloric Acid
- ▶ Methylene Chloride
- ▶ 50% Sodium Hydroxide
- ▶ Acetic Acid
- ▶ Most acids, alkalis, and solvents

Industry Applications

- ▶ **Chemical Processing** - Tanks, vessels, hazardous waste, secondary containment, chemical plant floors, etc.
- ▶ **Paper & Pulp** - Digesters, black liquor tanks, bleaching, etc.
- ▶ **Mining** - Acid tanks, scrubbers, etc.
- ▶ **High Technology** - Clean rooms, floors, etc.
- ▶ **Power Generation** - FGD systems, ducts and stacks, etc.
- ▶ **Steel** - Pickling tanks, acid storage, acid waste neutralization,
- ▶ **Waste Water** - Tanks, clarifiers, flocculation basins, neutralization chambers, concrete containment, etc.

Product Highlights

- ▶ Superior corrosion resistance, exceptional toughness
- ▶ Superior bonding qualities
- ▶ Applied to pitted and/or corroded steel
- ▶ Maximum versatility; product cycling
- ▶ Ambient or low temperature forced air cure
- ▶ Very low VOC - 99 grams/liter (0.80 lbs. per gallon)
- ▶ Non-permeable, steam cleanable, and field repairable
- ▶ Resists hydroblasting
- ▶ Excellent UV resistance
- ▶ Complies with FDA 21 CFR 175.300 for food handling
- ▶ ChemLine[®] is generally recognized as safe (GRAS) for food grade cargoes. ChemLine[®] 784 coating complies with the FDA and all applicable food additive regulations.
- ▶ High impact resistance
- ▶ Dry heat resistance to 400° F (204° C)


Typical Properties

- ▶ Stock Colors _____ Gray, Red
- ▶ V.O.C. Level/Gal. _____ 99 grams/L (0.80 lbs./gal.)
- ▶ Lead Content _____ Zero
- ▶ Chromate Content _____ Zero
- ▶ Pot Life _____ 30 minutes @ 75°F (24°C)
- ▶ Viscosity Reduction _____ Reduce with Toluene or Xylene
- ▶ Solids by Volume _____ 89.6%
- ▶ Recommended Film Thickness (dry) mils average
_____ Steel: 12 mils (300 microns)
_____ Concrete: 20 mils (500 microns)
- ▶ Shelf Life _____ 12 months


For most current application and technical information, contact Advanced Polymer Coatings customer service.

▶ The Technology; Epoxies, Vinylesters and ChemLine® 784/32 Form 3 Dimensional Screen-Like Structures when Cured


The Greater the Distance Between the Crosslinks, the Greater the Permeation Causing Chemical Attack and Absorption

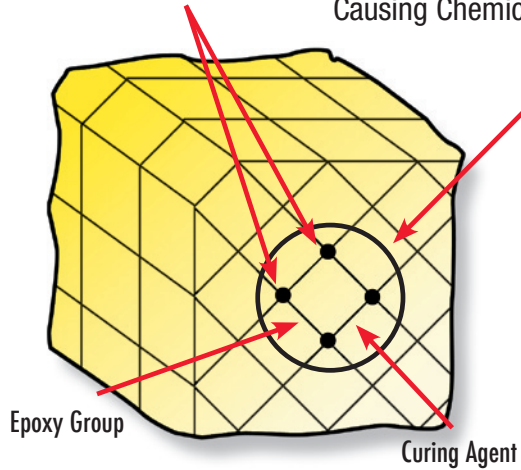

The Following Diagrams Represent the Same Coating Cutaway (pictured left)




Epoxy
2 Functionality
Forms 4 Cross-links



ChemLine® 784
28 Functionality
Forms up to 784 Cross-links,
the Highest Cross-link Density


Problems with Epoxies and Vinylesters

Vinylester's and Epoxy's Open Screen Structure

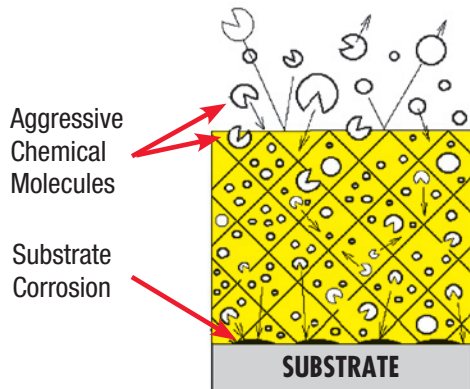

AGGRESSIVE CHEMICAL MOLECULES PENETRATE INTO AND THROUGH THE POLYMER GROUPS ATTACKING BOTH THE INNER POLYMER STRUCTURE AND THE SUBSTRATE.

ChemLine 784's Closed Screen Structure

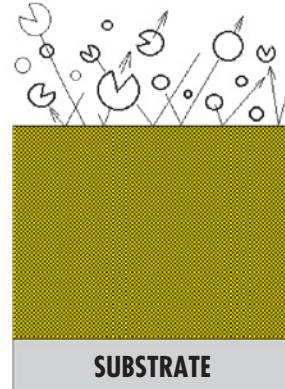

AGGRESSIVE CHEMICAL MOLECULES CANNOT PENETRATE THE HIGH DENSITY SURFACE. INNER POLYMER STRUCTURE AND SUBSTRATE PROTECTED FROM CHEMICAL ATTACK.

ChemLINE® 784/32

- ▶ 28 functionality forming 784 crosslinks
- ▶ Majority of crosslinks are through Ether (C-O-C) bonds. Ether bonds are one of the strongest bonds in chemistry. Ether bonds give flexibility with chemical resistance.
- ▶ No ester groups

Superior Corrosion Resistance Performance

	ChemLine® 784/32	Phenolic Epoxy	Vinylester	Stainless Steel
Acetaldehyde	A	L	N	A
Acetic Acid	A	N	N	A
Acrolein Acid	A	N	—	A
Acrylic Acid	A	N	N	A
Acrylonitrile	A	N	N	A
Ammonium Persulfate	A	A	A	L
Azabenzene	A	N	N	A
Benzene	A	A	N	A
Benzene Carboxylic Acid	A	A	N	A
Benzoyl Chloride	A	N	N	N
B-Methacrylic Acid	A	N	N	A
Bichromate of Soda	A	N	A	A
Bromine	A	N	N	A
Butanoic Acid	A	N	—	A
Butyric Aldehyde	A	N	A	A
Calcium Hydroxide	A	A	A	A
Calcium Hypochlorite	A	A	A	L
Caustic Potash	A	N	N	A
Carbolic Acid	A	N	N	A
Chlorine Water	A	N	A	N
Chlorosulfonic Acid	A	N	N	N
Chlorinated Acetone	A	N	N	L
Chloroacetic Acid	A	N	N	L
Chromic Acid	A	N	A	N
Coal Tar Oil	A	N	A	A
Coconut Fatty Acid	A	A	A	A
Colamine	A	N	N	A
Cresol	A	N	—	A
Dichloromethane	A	N	N	A
Detergents	A	A	A	A
Diethyl Formamide	A	N	N	A
Diethylamine	A	N	N	A
Diethylene Chloride	A	N	N	L
Diethyl Ether	A	N	N	A
Dimethylamide Acetate	A	N	—	A
Disulphuric Acid	A	N	—	A
EDTA	A	N	A	A
Ethanolamine	A	N	N	A
Ethnic Acid Anhydride	A	N	—	A
Ethyl Acrylate	A	A	N	A
Fatty Acids	A	A	A	A
Fatty Acid, Palm	A	A	A	A
Ferric Chloride	A	N	A	N
Flaked Stearic Acid	A	N	A	A

	ChemLine® 784/32	Phenolic Epoxy	Vinylester	Stainless Steel
Fluoroboric Acid	A	N	—	N
Formaldehyde	A	A	A	A
Formamide	A	N	—	A
Formic Acid 10%	A	N	A	A
Green Liquor	A	N	A	L
Glycerol	A	N	N	A
Grape Juice	A	A	A	A
Grapefruit Juice	A	A	A	A
Grease Oil	A	A	A	A
Heptanoic Acid	A	A	—	A
Herring Oil	A	A	A	A
Hexahydroaniline	A	N	—	A
HMDA	A	N	—	A
Hydrazine	A	N	N	A
Hydrobromic Acid	A	N	A	N
Hydrochloric Acid	A	N	A	N
10% Hydrofluoric Acid	A	N	A	N
5-20% Hydrogen Chloride	A	N	—	N
20% Hydrogen Peroxide	A	N	A	A
10%-30% Hydrogen Sulfate	A	N	A	A
5%-12% Hypochlorite Bleach	A	N	A	N
Isobutanol	A	N	A	A
Isobutyric Acid	A	N	—	A
Isopropyl Amine	A	N	A	A
Javelle Water	A	N	A	N
Juices, Fruit	A	A	A	A
Lactic Acid	A	A	A	A
Lactonitrile	A	N	—	A
Latex	A	A	A	A
Liquified Ammonia	A	N	N	A
Liquid Pitch Oil	A	N	A	A
M-Phosphoric Acid	A	N	A	L
Maleic Anhydride	A	N	A	A
MCA	A	N	—	A
Methacrylonitrile	A	N	N	A
Methanamide	A	N	—	A
Methanol	A	N	N	A
MEK	A	L	N	A
Methylene Chloride	A	N	N	N
Monochloroacetic Acid	A	N	N	N
Monochloro Benzene	A	N	N	N
Naphtalene	A	N	A	A
Nitric Acid 1-20%	A	N	A	A
Nitro Benzene	A	A	N	A

	ChemLine® 784/32	Phenolic Epoxy	Vinylester	Stainless Steel
Nitrogen Fertilizers	A	A	—	A
Norval Amine	A	N	N	A
Octanoic Acid	A	A	—	A
Orthonitro Benzene	A	N	N	N
Oleum	A	N	N	A
Olive Oil Fatty Acid	A	A	A	A
Palm Oil Fatty Acid	A	A	A	A
Perchloroethylene	A	N	N	A
Perchloric Acid	A	N	N	N
Phenol	A	N	N	A
Phosphoric Acid	A	N	A	N
Phthalic Anhydride	A	N	A	A
Piperzine	A	N	—	A
Polyethylene Polyamines	A	N	—	A
Potassium Hydroxide	A	A	L	L
Potassium Permanganate	A	A	A	L
Propionic Acid	A	N	N	A
Pyridine	A	N	N	A
Rubber Extender Oils	A	A	A	A
Rum	A	A	A	A
Sodium Carbonate	A	N	A	N
Sodium Dichromate	A	N	A	A
Sodium Hydroxide	A	A	A	L
Sodium Hypochlorite	A	N	A	N
Sodium Sulfide	A	A	N	N
Stannic Chloride	A	A	A	N
Stearic Acid	A	A	A	A
Spent Sulfuric Acid	A	N	N	A
Sulfur	A	N	N	A
Sulfuric Acid 1-70%	A	A	A	N
Sulfuric Acid 70-99%	A	N	N	L
Sulphurous Acid	A	N	N	A
Tall Oil	A	A	A	A
Tallow Acid	A	A	N	A
Tar Acid	A	N	A	A
Tetra Chloroacetic Acid	A	N	N	N
Tetra Hydrofurfuryl Alcohol	A	N	N	A
Toluene Diamine	A	N	N	A
Toluol	A	L	L	A
Valeraldehyde	A	N	—	A
Vinegar	A	N	A	A
Vitriol Oil 65%	A	N	A	A
Water, Acid	A	N	N	A
Xylenol	A	N	N	A

A = Good at ambient temperatures L = Limited Service N = Not recommended

Corrosion resistance data for Phenolic Epoxy, Vinylester and Stainless Steel from published literature.

ChemLINE[®] 784/32

A History of Performance

For more than a decade ChemLine[®] coatings have withstood the tremendous stresses and extremes of chemical attack and abrasive wear. ChemLine[®] has been proven worldwide under the most arduous operating conditions, from resisting the most aggressive chemicals to handling hot pipelines in sub-freezing temperatures, with a history of success. Based on this experience, the development of

ChemLine[®] 784/32 represents a quantum leap in chemical resistant polymer coatings.

Add to Your Profits — Specify ChemLine[®] 784/32

For the full story on ChemLine[®], contact APC or click onto our web site at www.adv-polymer.com for the most versatile, technologically advanced and cost effective protection available.



The furnishing of the information contained herein does not constitute a representation by Advanced Polymer Coatings (APC) that any product or process is free from patent infringement claims of any third party, nor does it constitute the grant of a license under any patent of APC or any third party. APC assumes no liability for any infringement which may arise out of the use of the product. APC warrants that its products meet the specifications which it set for them. APC DISCLAIMS ALL OTHER WARRANTIES and relating to the products and DISCLAIMS ALL WARRANTIES RELATING TO THEIR APPLICATION expressed or implied INCLUDING but not limited to warranties of MERCHANTABILITY AND FITNESS for particular purpose. Receipt of products from APC constitutes acceptance of

the terms of the Warranty; contrary provisions of purchase orders not withstanding. In the event that APC finds that products delivered are off-specification, APC will at its sole discretion, either replace the products or refund the purchase price thereof. APC's choice of one of these remedies shall be Buyer's sole remedy. APC will under no circumstances be libeled upon for consequential damages except in so far as liability is mandated by law. APC will deliver products at agreed upon times in so far as it is reasonably able to do so, but APC shall not be liable for failure to deliver on time when the failure is beyond its reasonable control.

© 2010 1101



Advanced Polymer Coatings
Avon, Ohio 44011 U.S.A.
+01 440-937-6218 Phone
+01 440-937-5046 Fax
800-334-7193 Toll-Free in USA & Canada

Advanced Polymer Coatings is an...



ABS Certified Manufacturing Company
ISO 9001: 2008
Certificate No. 43217

www.adv-polymer.com